Bulkhead fittings & couplings

for pneumatic hoses 4-12 mm



The bulkhead fittings & couplings for pneumatic hoses are also available individually, e.g. for use with the <u>AT-K-M</u> and <u>QT-AT-K-M adapter grommets</u>.

This means that pneumatic bulkhead couplings M12 \times 1.0 and M14 \times 1.0 can be integrated directly into the cable entry frame.

RoHS compliant



Specifications

Material	Brass, nickel-plated
Flame class	UL94-V0, self-extinguishing
Operating temperature	-40 C° to 100 C°
Properties	silicone free, halogen free
Mounting options	Screw type mounting

Advantages & benefits

- By utilising the adapter grommets AT-K-M, pneumatic bulkhead fittings & couplings can be integrated directly into the cable entry frame
- Separate cut-outs are no longer necessary
- Space-saving solution

Product types & sizes

Bulkhead coupling D4



Part No. **99210**EAN **4251269325**


601

Package **10**

quantity

Thread M12 x 1,0 Length 30,8 mm For pneumatic 4 mm

hose



Part No. **99211**

EAN **4251269325**

618


Package **10**

quantity

Thread M14 x 1,0 Length 32,3 mm For pneumatic 6 mm

hose

Bulkhead fitting D8



Part No. **99227**

EAN **4251269332**

012 10


Package

quantity

Thread 1/4"
Length 23 mm
For pneumatic 8 mm

hose

Bulkhead fitting D10

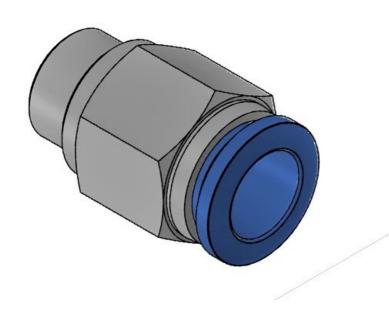

Part No. 99228

EAN **4251269332**

029 10


Package

quantity

Thread **1/4**"
Length **29,5 mm**

For pneumatic 10 mm

hose

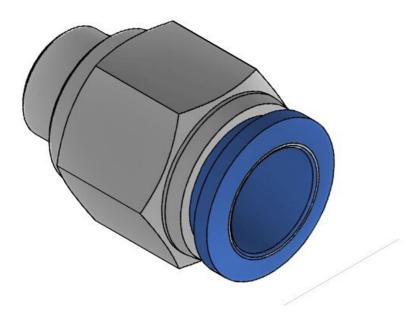

Part No. **99229**

EAN **4251269332**

036

Package **10**

quantity

Thread 1/4"
Length 31,5 mm
For pneumatic 12 mm

hose

