


# KEL-BES-S split cable gland with brush strips

for cable pass-through, thread sizes M32 / M50

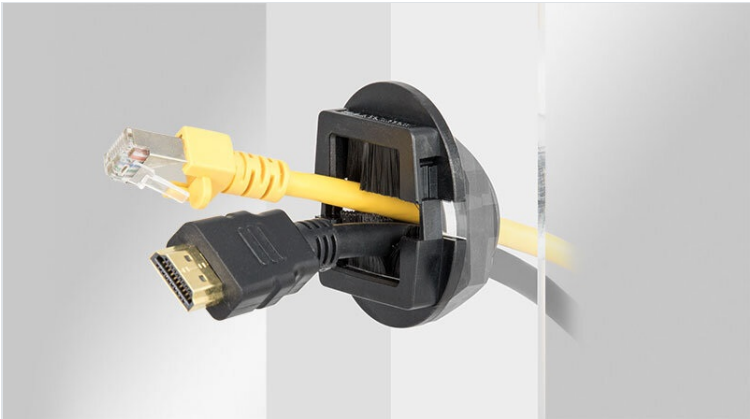

For round metric cut-outs M32/M50 icotek offers the split cable gland with brush strips KEL-BES-S round. It can be either directly snapped into the cut-out or screwed with a locknut, which is included in the shipment.

Split cable glands with brush strips KEL-BES-S are suited for routing cables into server racks, control panels and electrical enclosures. Due to the split frame the KEL-BES-S can also be subsequently installed around the routed cables.

**Note:** Snap-in mounting possible if wall thickness is 1 - 2.5 mm. For wall thickness < 1 mm and > 2.5 mm, a locknut must be used.

## Specifications


|                       |                                     |
|-----------------------|-------------------------------------|
| Material              | Polycarbonate<br>Brushes: Polyamide |
| Flame class           | UL94-V0, self-extinguishing         |
| Operating temperature | -20 C° to 90 C°                     |
| Properties            | silicone free, halogen free         |
| Mounting options      | Fasten with locknut,Snap-in         |

## Advantages & benefits


- Fast and easy assembly
- Subsequent assembly possible
- Versatile utilisation
- Allows reduced airflow while filtering out dust, hair and larger particulate matter
- Visual screening
- Protects cables against wear due to sharp edges of the cut-out

## Product types & sizes

KEL-BES-S 32

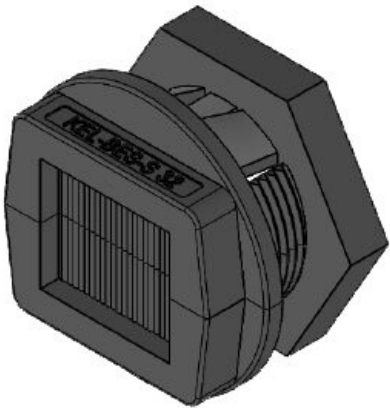

|                      |                   |                         |                  |
|----------------------|-------------------|-------------------------|------------------|
| Part No.             | <b>51538</b>      | Thread                  | <b>M32 × 1,5</b> |
| EAN                  | <b>4251269318</b> | Thread length           | <b>20 mm</b>     |
|                      | <b>702</b>        | For min. wall thickness | <b>1 mm</b>      |
| Package quantity     | <b>10</b>         | For max. wall thickness | <b>2,5 mm</b>    |
| Mounting height      | <b>10 mm</b>      |                         |                  |
| External diameter    | <b>46 mm</b>      |                         |                  |
| Cut-out size, metric | <b>M32</b>        |                         |                  |
| Cut-out size, round  | <b>32,3 mm</b>    |                         |                  |

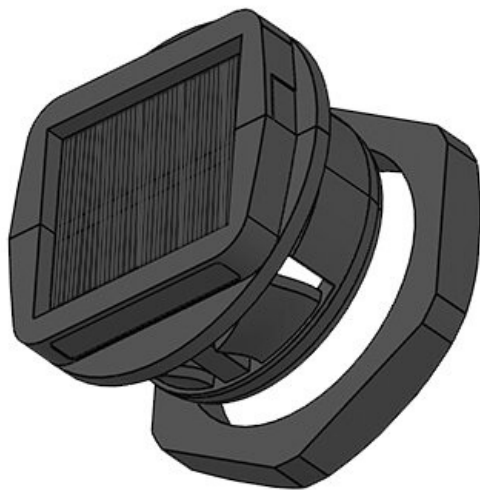

|               |                   |               |                  |
|---------------|-------------------|---------------|------------------|
| Part No.      | <b>51540</b>      | Thread        | <b>M50 × 1,5</b> |
| EAN           | <b>4251269318</b> | Thread length | <b>20 mm</b>     |
|               | <b>306</b>        | For min. wall | <b>1 mm</b>      |
| Package       | <b>10</b>         | thickness     |                  |
| quantity      |                   | For max. wall | <b>2,5 mm</b>    |
| Mounting      | <b>10 mm</b>      | thickness     |                  |
| height        |                   |               |                  |
| External      | <b>62,5 mm</b>    |               |                  |
| diameter      |                   |               |                  |
| Cut-out size, | <b>M50</b>        |               |                  |
| metric        |                   |               |                  |
| Cut-out size, | <b>50,4 mm</b>    |               |                  |
| round         |                   |               |                  |