

# KEL-BES brush plate

for cable pass-through



Brush plates KEL-BES for routing cables into server racks, control panels and electrical enclosures. KEL-BES is also an ideal solution for entry and exit of cables that are routed inside raised floors, e.g. in computer centres.

The brush plates can either be mounted via screws or via [expanding rivets](#).

The KEL-BES plates match exactly the cut-out dimensions 10-, 16- and 24-pin standard industrial connectors.

## Specifications

Material	Polyamide Brushes: Polyamide
Flame class	UL94-V0, self-extinguishing
Operating temperature	-20 C° to 90 C°
Properties	silicone free, halogen free
Mounting options	Screw type mounting,Riveting

## Advantages & benefits

- Fast and easy assembly
- Versatile utilisation
- Allows reduced airflow while filtering out dust, hair and larger particulate matter
- Visual screening
- Protects cables against wear due to sharp edges of the cut-out

## Product types & sizes

KEL-BES 24




Part No.	<b>51515</b>	Cut-out size	<b>112 × 36 mm</b>
EAN	<b>4251269315</b>	No. of screw holes	<b>4</b>
	<b>442</b>	Diam. of screw holes	<b>5,8 mm</b>
Package quantity	<b>10</b>		
Length	<b>147 mm</b>		
Width	<b>58 mm</b>		
Height	<b>10 mm</b>		
Mounting height	<b>10 mm</b>		

**KEL-BES 16**



Part No.	<b>51510</b>	Cut-out size	<b>86 × 36 mm</b>
EAN	<b>4251269315435</b>	No. of screw holes	<b>4</b>
Package quantity	<b>10</b>	Diam. of screw holes	<b>5,8 mm</b>
Length	<b>120 mm</b>		
Width	<b>58 mm</b>		
Height	<b>10 mm</b>		
Mounting height	<b>10 mm</b>		

**KEL-BES 10**

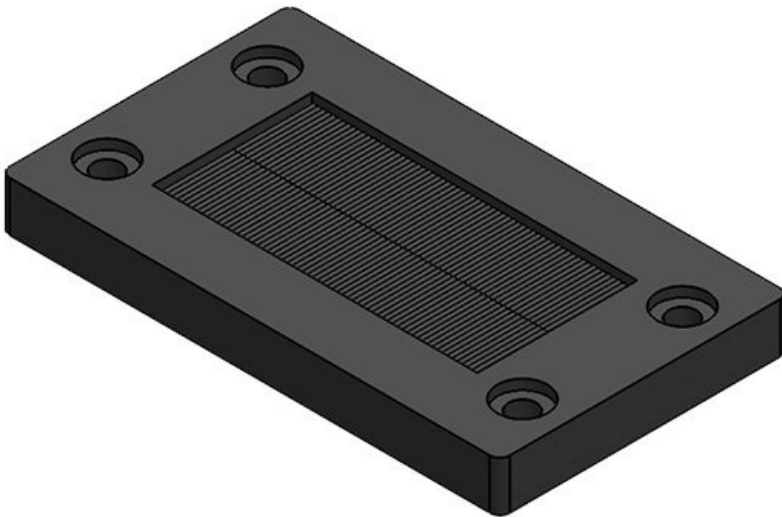

Part No.	<b>51505</b>	Cut-out size	<b>65 × 36 mm</b>
EAN	<b>4251269315428</b>	No. of screw holes	<b>4</b>
Package quantity	<b>10</b>	Diam. of screw holes	<b>5,8 mm</b>
Length	<b>100 mm</b>		
Width	<b>58 mm</b>		
Height	<b>10 mm</b>		
Mounting height	<b>10 mm</b>		