


KEL-DPZ-CLICK multi-membrane cable entry plates

for snap-in mounting, M25 - M63 / IP65 / IP66 / IP68

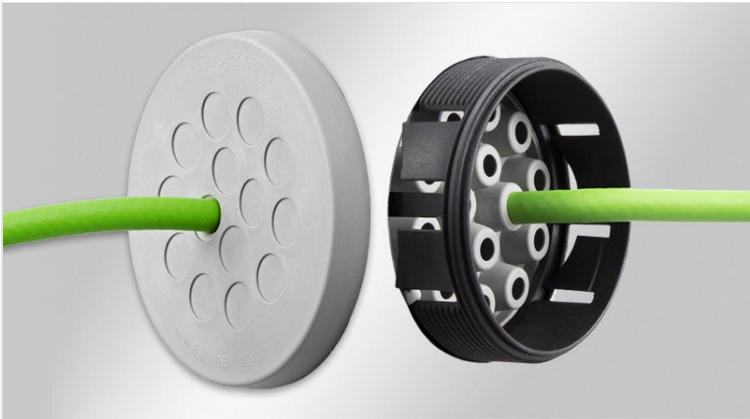

KEL-DPZ-CLICK cable entry plates are designed to route and seal cables without connectors or fibre optics (from 1.5 mm to 22 mm in diameter) in limited space.

The new variant of the proven cable entry plate KEL-DPZ is snapped into the cut-out directly from the front. This significantly reduces the assembly time. Alternatively, the new variant can be fastened with a locknut. The KEL-DPZ-CLICK series have a thread to fit in metric cut-outs from M25 to M63. Thus cut-outs for metric cable glands can be used.

Snapped into the cut-out:

For wall thickness 1 – 2.5 mm
Protection IP65

Fixed with a locknut:

For max. wall thickness 11 mm
Protection IP66 / IP68

The assembly of the KEL-DPZ-CLICK with unterminated cables or pneumatic hoses can be done quick and easy. Simply make a small hole in the thin membrane, push the cables through. The KEL-DPZ-CLICK provides strain relief and protection IP65 / IP66 / IP68 (certified acc. to EN 60529).

ST-B Plugs can be used for sealing pierced membranes if cables have been removed.

Locknuts are NOT included in the shipment.

IP54

IP68

IP55

IP64

IP65

IP66

Made in Germany

IP67

Specifications


IP rating (EN 60529)	IP54, IP55, IP64, IP65, IP66, IP67, IP68
Material	Elastomer Base frame: Polyamide
Flame class	UL94-V0, self-extinguishing
Operating temperature	-40 C° to 100 C°
Properties	silicone free, halogen free
Mounting options	Fasten with locknut,Snap-in

Advantages & Benefits

- Fast mounting
- Offers two mounting types: Snap-in and locknut fixation
- High cable density
- Certified protection classes IP65/IP66/IP68 (acc. to EN 60529)
- Automatic sealing and strain relief for the cable
- Suitable for metric cut-outs
- Hygienic design - free of dirt-collecting recesses

Product Types & Sizes


KEL-DPZ-CLICK 25|3
gy



Part No. **44050**
EAN **4251269323065**
Package quantity **10**
For max. no. of cables **3**
Max. cable diameter **6,5 mm**
Color **gray (similar RAL 7035)**
Height **28 mm**

Mounting height **8 mm**
External diameter **39 mm**
Cut-out size, round **25,3 mm**
Cut-out size, metric **M25**
Thread **M25 × 1,5**
Thread length **20 mm**
Suitable locknut **52284**
Clamping range **2 x 3.2 - 5.2 mm**
1 x 3.2 - 6.5 mm


KEL-DPZ-CLICK 25|4
gy



Part No. **44051**
EAN **4251269323072**
Package quantity **10**
For max. no. of cables **4**
Max. cable diameter **5,2 mm**
Color **gray (similar RAL 7035)**
Height **28 mm**

Mounting height **8 mm**
External diameter **39 mm**
Cut-out size, round **25,3 mm**
Cut-out size, metric **M25**
Thread **M25 × 1,5**
Thread length **20 mm**
Suitable locknut **52284**
Clamping range **4 x 3.2 - 5.2 mm**


KEL-DPZ-CLICK 32|4
gy



Part No. **44052**
EAN **4251269323089**
Package quantity **10**
For max. no. of cables **4**
Max. cable diameter **12,5 mm**
Color **gray (similar RAL 7035)**
Height **28 mm**

Mounting height **8 mm**
External diameter **44 mm**
Cut-out size, round **32,3 mm**
Cut-out size, metric **M32**
Thread **M32 × 1,5**
Thread length **20 mm**
Suitable locknut **52285**
Clamping range **3 x 3.2 - 6.5 mm**
1 x 7.2 - 12.5 mm


KEL-DPZ-CLICK 32|4-2
gy



Part No. **44053**
EAN **4251269323096**
Package quantity **10**
For max. no. of cables **4**
Max. cable diameter **9,5 mm**
Color **gray (similar RAL 7035)**
Height **28 mm**

Mounting height **8 mm**
External diameter **44 mm**
Cut-out size, round **32,3 mm**
Cut-out size, metric **M32**
Thread **M32 × 1,5**
Thread length **20 mm**
Suitable locknut **52285**
Clamping range **4 x 5 - 9.5 mm**


KEL-DPZ-CLICK 32|7
gy



Part No. **44054**
EAN **4251269323102**
Package quantity **10**
For max. no. of cables **7**
Max. cable diameter **6,5 mm**
Color **gray (similar RAL 7035)**
Height **28 mm**

Mounting height **8 mm**
External diameter **44 mm**
Cut-out size, round **32,3 mm**
Cut-out size, metric **M32**
Thread **M32 × 1,5**
Thread length **20 mm**
Suitable locknut **52285**
Clamping range **7 x 3.2 - 6.5 mm**


KEL-DPZ-CLICK 40|8
gy



Part No. **44055**
EAN **4251269323119**
Package quantity **10**
For max. no. of cables **8**
Max. cable diameter **10,2 mm**
Color **gray (similar RAL 7035)**
Height **28 mm**


Mounting height **8 mm**
External diameter **52 mm**
Cut-out size, round **40,4 mm**
Cut-out size, metric **M40**
Thread **M40 × 1,5**
Thread length **20 mm**
Suitable locknut **52286**
Clamping range **4 x 3.2 - 6.5 mm**
4 x 5 - 10.2 mm

KEL-DPZ-CLICK 50|8
gy




Part No.	44056	Mounting height	8 mm
EAN	4251269323126	External diameter	62 mm
Package quantity	10	Cut-out size, round	50,4 mm
For max. no. of cables	8	Cut-out size, metric	M50
Max. cable diameter	12,5 mm	Thread	M50 × 1,5
Color	gray (similar RAL 7035)	Thread length	20 mm
Height	28 mm	Suitable locknut	52287
		Clamping range	5 x 5 - 10.2 mm 3 x 7.2 - 12.5 mm

KEL-DPZ-CLICK 50|10
gy




Part No.	44057	Mounting height	8 mm
EAN	4251269323133	External diameter	62 mm
Package quantity	10	Cut-out size, round	50,4 mm
For max. no. of cables	10	Cut-out size, metric	M50
Max. cable diameter	22,2 mm	Thread	M50 × 1,5
Color	gray (similar RAL 7035)	Thread length	20 mm
Height	28 mm	Suitable locknut	52287
		Clamping range	7 x 3.2 - 6.5 mm 2 x 5 - 10.2 mm 1 x 16 - 22.2 mm

KEL-DPZ-CLICK 50|12
gy




Part No.	44058	Mounting height	8 mm
EAN	4251269323140	External diameter	62 mm
Package quantity	10	Cut-out size, round	50,4 mm
For max. no. of cables	12	Cut-out size, metric	M50
Max. cable diameter	10,2 mm	Thread	M50 × 1,5
Color	gray (similar RAL 7035)	Thread length	20 mm
Height	28 mm	Suitable locknut	52287
		Clamping range	4 x 3.2 - 6.5 mm 8 x 5 - 10.2 mm

KEL-DPZ-CLICK 50|19
gy




Part No.	44059	Mounting height	8 mm
EAN	4251269323157	External diameter	62 mm
Package quantity	10	Cut-out size, round	50,4 mm
For max. no. of cables	19	Cut-out size, metric	M50
Max. cable diameter	6,5 mm	Thread	M50 × 1,5
Color	gray (similar RAL 7035)	Thread length	20 mm
Height	28 mm	Suitable locknut	52287
		Clamping range	19 x 3.2 - 6.5 mm

KEL-DPZ-CLICK 50|78
gy



Part No.	44060	Mounting height	8 mm
EAN	4251269323164	External diameter	62 mm
Package quantity	10	Cut-out size, round	50,4 mm
For max. no. of cables	78	Cut-out size, metric	M50
Max. cable diameter	5 mm	Thread	M50 × 1,5
Color	gray (similar RAL 7035)	Thread length	20 mm
Height	28 mm	Suitable locknut	52287
		Clamping range	76 x 1.5 - 2.6 mm 2 x 2.5 - 5 mm


**KEL-DPZ-CLICK 63|9
gy**



Part No. **44061**
EAN **4251269323171**
Package quantity **10**
For max. no. of cables **9**
Max. cable diameter **22,2 mm**
Color **gray (similar RAL 7035)**
Height **28 mm**

Mounting height **8 mm**
External diameter **75 mm**
Cut-out size, round **63,4 mm**
Cut-out size, metric **M63**
Thread **M63 × 1,5**
Thread length **20 mm**
Suitable locknut **52288**
Clamping range **1 x 3.2 - 6.5 mm**
3 x 5 - 10.2 mm
4 x 9 - 16.2 mm
1 x 16 - 22.2 mm


**KEL-DPZ-CLICK 63|13
gy**



Part No. **44062**
EAN **4251269323188**
Package quantity **10**
For max. no. of cables **13**
Max. cable diameter **16,2 mm**
Color **gray (similar RAL 7035)**
Height **28 mm**

Mounting height **8 mm**
External diameter **75 mm**
Cut-out size, round **63,4 mm**
Cut-out size, metric **M63**
Thread **M63 × 1,5**
Thread length **20 mm**
Suitable locknut **52288**
Clamping range **4 x 3.2 - 6.5 mm**
4 x 5 - 10.2 mm
5 x 9 - 16.2 mm


**KEL-DPZ-CLICK 63|14
gy**



Part No. **44063**
EAN **4251269323195**
Package quantity **10**
For max. no. of cables **14**
Max. cable diameter **10,2 mm**
Color **gray (similar RAL 7035)**
Height **28 mm**

Mounting height **8 mm**
External diameter **75 mm**
Cut-out size, round **63,4 mm**
Cut-out size, metric **M63**
Thread **M63 × 1,5**
Thread length **20 mm**
Suitable locknut **52288**
Clamping range **14 x 5 - 10.2 mm**

**KEL-DPZ-CLICK 63|35
gy**



Part No. **44064**
EAN **4251269323201**
Package quantity **10**
For max. no. of cables **35**
Max. cable diameter **6,5 mm**
Color **gray (similar RAL 7035)**
Height **28 mm**

Mounting height **8 mm**
External diameter **75 mm**
Cut-out size, round **63,4 mm**
Cut-out size, metric **M63**
Thread **M63 × 1,5**
Thread length **20 mm**
Suitable locknut **52288**
Clamping range **35 x 3.2 - 6.5 mm**