

KEL-BES-S




	UL94-V0,
	-20 C° to 90 C°
	,


KEL-BES-S , , , ?

 10-, 16- 24-pin

-
-
-
- ,
-
-

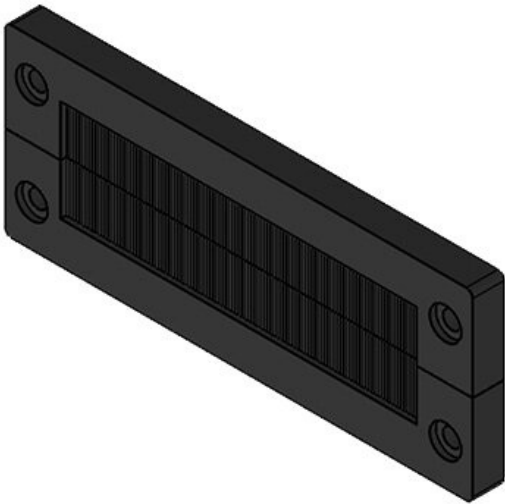

	51522		112 × 36 mm
EAN	425126931660		4
	9		5,8 mm
	10		
	147 mm		
	58 mm		
	10 mm		
	10 mm		

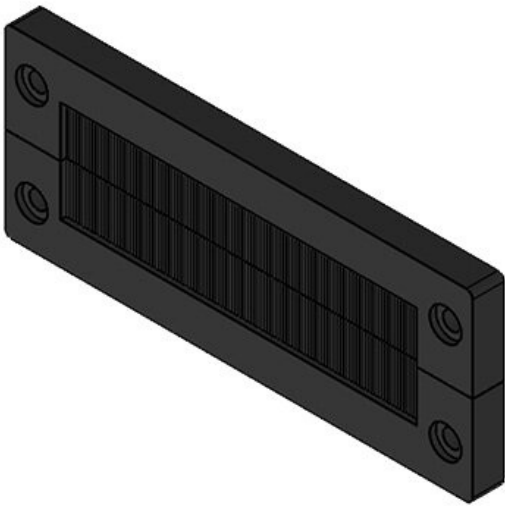


EAN

51522.002 □□ □□
425126932070 □□ □ □
5 □□□ □□
10
147 mm
58 mm
10 mm
10 mm

112 × 36 mm
4
5,8 mm

□□ □□

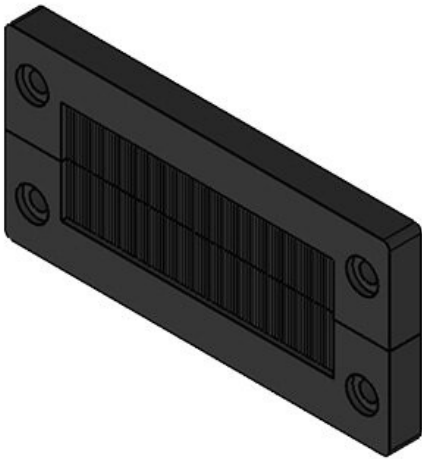


EAN

51521 □□ □□
425126931659 □□ □ □
3 □□□ □□
10
120 mm
58 mm
10 mm
10 mm

86 × 36 mm
4
5,8 mm

□□ □□

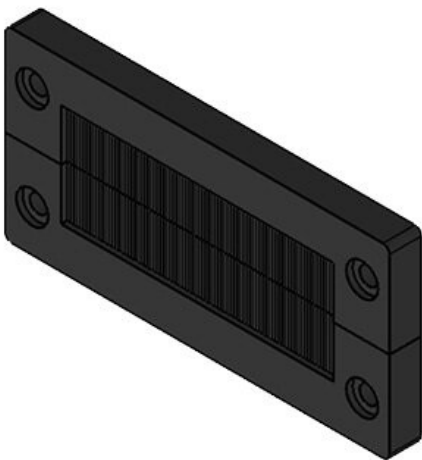

EAN

51521.002 □□ □□
425126932069 □□ □ □
9 □□□ □□
10
120 mm
58 mm
10 mm
10 mm

86 × 36 mm
4
5,8 mm

□□ □□



EAN

51520

□□ □□□

65 × 36 mm

425126931658

□□ □ □

4

6

□□□ □□

5,8 mm

10


100 mm

58 mm

10 mm

10 mm

□□ □□

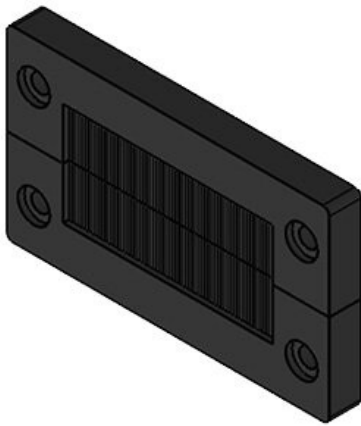

EAN

51520.002

□□ □□□

65 × 36 mm

425126932068

□□ □ □

4

2

□□□ □□

5,8 mm

10

100 mm

58 mm

10 mm

10 mm

□□ □□

icotek[®]
smart cable management