


□□□가 □□□ □□□□, M32 - M63 / IP54

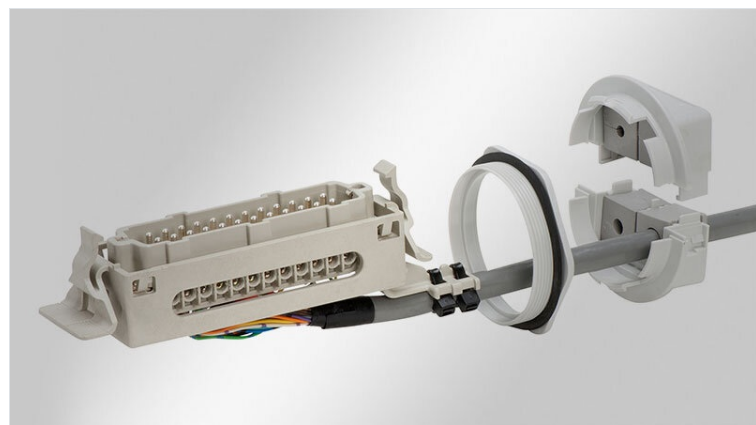


0000 0000 0000 0 000 KVT 000 00 000 00 000 00 0 0 0000.

IP 等级 (EN 60529)	IP54
	防尘防水
	UL94-V0, 阻燃
	-30 C° to 100 C°
	耐腐蚀, 耐盐雾
其它 特性	符合 CE, RoHS 标准

11 11 11

- [illegible]

□ □ □ □ □ □ □



EAN

□□□ □

□□ □□□ □□


111

45130
4251269311260
10
4
16 mm
□□(RAL 7035 □ □□)
40 mm

□□ □□
□□□□ □□ □□□
□□ □□ □□□

□□□ □□
□□□□ □□

21 mm
M32
32,3 mm
M32 x 1,5
11 mm
1 x KT □□



EAN

□□□ □

□□ □□□ □□


□□ □□□

45134
4251269311277
10
4
16 mm
□□(RAL 7035 □ □)
40 mm

□□ □□
□□□□ □□ □□□
□□ □□ □□□

□□□ □□
□□□□ □□

21 mm
M40
40,4 mm
M40 × 1,5
11 mm
1 x KT



EAN

□□□ □
□□ □□□ □□


□□ □□□

45152
4251269311284
5
16
17 mm
□□(RAL 7035 □ □)
70,5 mm

□□ □□
□□□□ □□ □□□
□□ □□ □□□

□□□ □□
□□□□ □□

21 mm
M63
63,4 mm
M63 × 1,5
11 mm
4 x KT □□



EAN

□□□ □
□□ □□□ □□

□□ □□□

45154
4251269311291
5
1
35 mm
□□(RAL 7035 □ □□)
70,5 mm

□□ □□
□□□□ □□ □□□
□□ □□ □□□

□□□ □□
□□□□ □□

21 mm
M63
63,4 mm
M63 × 1,5
11 mm
1 x KT □

icotek[®]
smart cable management