

□□ □□□□ □□  
□□□□ □□□□□ & □□□□



icetek ၵᄃᄃ ၵᄃᄃᄃᄃᄃ ᄃᄃᄃᄃ ᄃᄃ ᄃᄃᄃᄃ, ᄃᄃ ᄃᄃᄃᄃ ᄃᄃ 3mm ᄃᄃᄃᄃ, ᄃᄃᄃᄃ, ᄃᄃᄃᄃ ᄃᄃ ᄃᄃ ᄃᄃ 2mm ᄃᄃᄃᄃᄃ V2 3 ᄃᄃ 360 ᄃᄃᄃ ᄃᄃᄃᄃ, ᄃᄃᄃ ᄃᄃᄃ ᄃᄃᄃᄃ ᄃᄃᄃ ᄃᄃ ᄃᄃ ᄃᄃᄃᄃ.

□□□□ □□:

- 1 0000 000000 (00 2 kg)
- 1 000 000 Ø 9.5 mm (3/8"UNF) – Ø 19 mm (3/4"UNF), L: 105 mm
- 1 000 000 Ø 19.5 mm (3/4"UNF), L: 125 mm
- 1 0000 0
- 1 000
- 1 HSS 0000 (Multi Step Drill)
- 1 000000 000000
- 000000 00 PRO 16-32: M16, M20, M25, M32 000 00 10
- 000000 00 PRO 16-63: M16, M20, M25, M32, M40, M50, M63 000 00 10

□□□ □ □□

이 100 bar 이하의 450bar 이하의 압력에서 작동합니다. 이 압력에서 작동할 때, 이 압력에서 작동할 때 가압됩니다. 이 압력에서 작동할 때, 이 압력에서 작동할 때.

□□□□ □□:


- 1 吋 吋
- 吋 吋 吋 2.5m 吋 吋 吋 吋
- 1 吋 吋 吋 吋 吋 吋 吋 吋
- 1 吋 吋 吋 吋 吋 吋. 吋. 80209
- 1 吋 吋(吋) 吋 吋 M16-M25,
- 吋. 80200
- 1 吋 吋. 吋. 80204
- 1 吋 吋. 吋. 80202
- 1 吋 吋. 吋. 80203

00. 00000 000

□□ □□ □□ □□

- 360mm 가파른 홈 가파른 가
- 0.5mm 두께의 0.5mm 가 (2kg)
- 0.5mm 두께의 0.5mm 가
- 0.5mm 두께의 0.5mm 가
- 0.5mm 두께의 0.5mm 가

□□ □□ □ □□

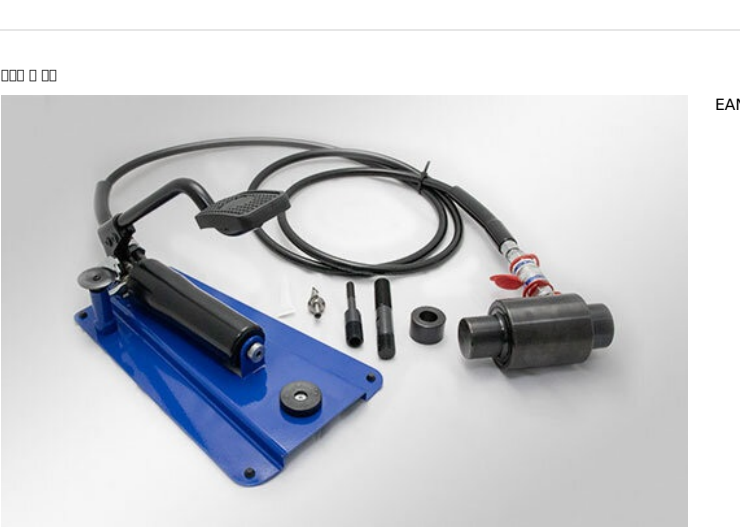

□□□ □ □□

EAN

80002  
4251269323690  
1  
60 kN  
450 bar



EAN

80003  
4251269332  
432  
1  
60 kN  
600 bar



EAN

80000  
4251269316  
135  
1  
60 kN  
600 bar



EAN

80005  
4251269316  
142  
1  
60 kN  
600 bar



EAN

80006  
4251269316  
159  
1  
60 kN  
600 bar

---

**icotek**<sup>®</sup>  
smart cable management