

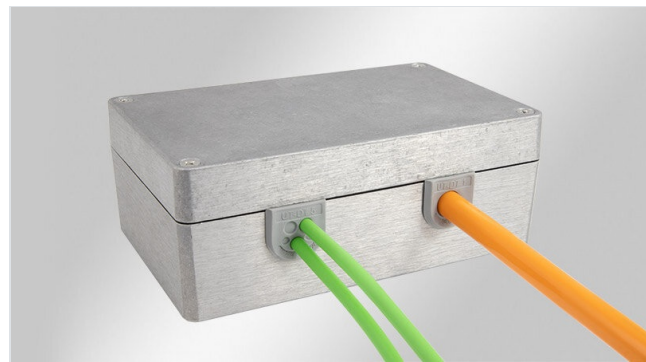



□□ □□□□, □□ □□ □□




이 제품은 IP54 등급의 방수 방진 성능을 갖추고 있습니다.



Technical drawing of a U-shaped component. The drawing shows two views of the component, which has a U-shaped top. The top width is 16. The height of the top flange is 10. The total height of the component is 18. The bottom of the U-shape has a rounded corner with a radius of R8. A dashed line indicates the center of the U-shape. A label 'Oberfläche Dichtkante' (Surface sealing edge) with a downward-pointing triangle symbol is located between the two views, indicating the sealing edge on the bottom surface.

- 000 000 00 500 000 00
- 000 0 00 1~4mm
- 00가 00 00 000 00
- 00 0000 000

IP 65 (EN 60529)	IP54
	600000
	UL94-V0, 0.0000
	-40 C° to 100 C°
	UV-0, 0.00 0.0, 0.0000
0.0 0.0	0.0-0




EAN
□□□ □

56120
4251269336553
10
1

23,5 mm
23 mm

□□ □□
□□ □ □□
□□ □ □□
□□□ □□ □

11 mm
5 mm
1 mm
4 mm
1 x 1 - 11 mm




EAN
□□□ □

56020
4251269335945
10
1
□□(RAL 7035□ □□)
23,5 mm
23 mm

□□ □□
□□ □ □□
□□ □ □□
□□□ □□ □

11 mm
5 mm
1 mm
4 mm
1 x 1 - 11 mm




EAN
□□□ □

56121
4251269336560
10
4

23,5 mm
23 mm

□□ □□
□□ □ □□
□□ □ □□
□□□ □□ □

11 mm
5 mm
1 mm
4 mm
1 x 1 - 3.2 mm
1 x 1 - 4.2 mm
2 x 1 - 6.4 mm




EAN
□□□ □

56021
4251269335952
10
4
□□(RAL 7035□ □□)
23,5 mm
23 mm

□□ □□
□□ □ □□
□□ □ □□
□□□ □□ □

11 mm
5 mm
1 mm
4 mm
1 x 1 - 3.2 mm
1 x 1 - 4.2 mm
2 x 1 - 6.4 mm




EAN
□□□ □

56122
4251269336577
10
5

23,5 mm
23 mm

□□ □□
□□ □ □□
□□ □ □□
□□□ □□ □

11 mm
5 mm
1 mm
4 mm
2 x 1 - 3.2 mm
3 x 1 - 5.2 mm



EAN
□□□ □

56022
4251269335969
10
5
□□(RAL 7035□ □□)
23,5 mm
23 mm

□□ □□
□□ □ □□
□□ □ □□
□□□ □□ □

11 mm
5 mm
1 mm
4 mm
2 x 1 - 3.2 mm
3 x 1 - 5.2 mm

