

KEA | 90° kabelgenomföringsadapter

för delade kabelgenomföringsramar & kabelgenomföringsplattor / upp till IP66



KEA 24 is a cable entry adapter for accommodating various icotek cable entry frames and plates of size 24. The adapter allows cables to be routed at a 90° angle. The installation direction can be horizontal or vertical. The cables are protected against mechanical tension in the entry and exit areas. Wall mounting is done either with screws and nuts or by using threaded bushings. A suitable wall seal is included in the scope of delivery. icotek also offers suitable punches for the cut-out.

The cable entry plates KEL-DP 24 Type B can be easily snapped onto the KEA 24 W90 R. The cable entry frames KEL 24, KEL-U 24, KEL-ER 24 and the cable entry plates KEL-DPZ 24 and KEL-DPU 24 can be screwed onto the KEA 24 W90 S. This enables the insertion of pre-assembled and non-assembled cables.

Protection class (KEA + ...):

- KEL-ER 24: IP54, IP65
- KEL-U 24: IP54
- KEL 24: IP54
- KEL-DPU 24: IP54, IP65
- KEL-DPZ 24: IP54, IP65, IP66
- KEL-DP 24 B: IP54

IP54

RoHS compliant

IP65

REACH COMPLIANCE

IP66

Made in Germany

HL3

EN 45545-2

EN 61373

ECOLAB

certified


Borrow a sample now

Specifikationer


IP-Klass (EN 60529)	IP54, IP65, IP66
Material	Polyamid
Brandklass	UL94-V0, självslocknande
Temperatur	-40 C° till 120 C°
Egenskaper	vibrationssäker, silikonfri, halogenfri
Monteringstyp	Skruvmontering, Snap-in

Produkttyper och storlekar

Fördelar

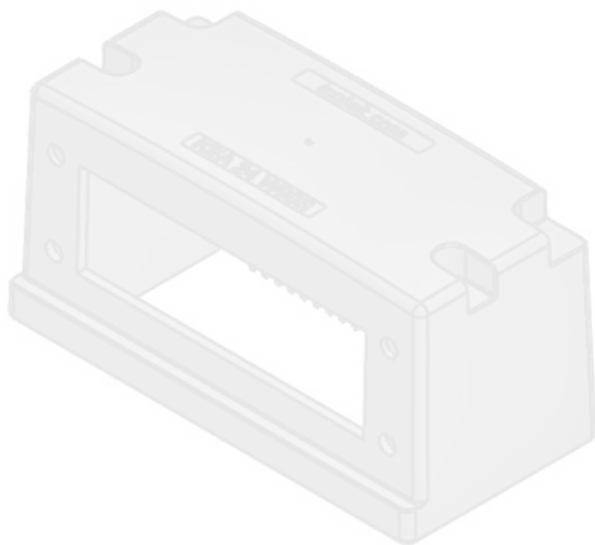

ArtNr.	48301	Utskärning	112 × 56 mm
EAN	4251269334	Antal skruvhål	4
	658	Skruvhålens diameter	6 mm
Antal	1	Lämplig för:	KEL-ER 24,
Längd	157 mm		KEL-U 24,
Bredd	75 mm		KEL 24, KEL-
Höjd	77 mm		DPU 24, KEL-
Monteringshöjd	77 mm		DPZ 24

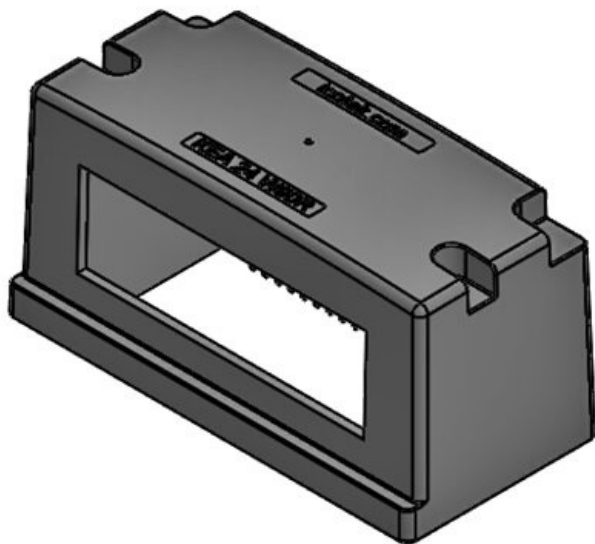

ArtNr.	48300	Utskärning	112 × 56 mm
EAN	4251269334	Antal skruvhål	4
	641	Skruvhålens diameter	6 mm
Antal	1	Lämplig för:	KEL-DP 24 B
Längd	157 mm		
Bredd	75 mm		
Höjd	77 mm		
Monteringshöjd	77 mm		