


# KEL-DPZ-CLICK multi-membrane cable entry plates

for snap-in mounting, M25 - M63 / IP65 / IP66 / IP68

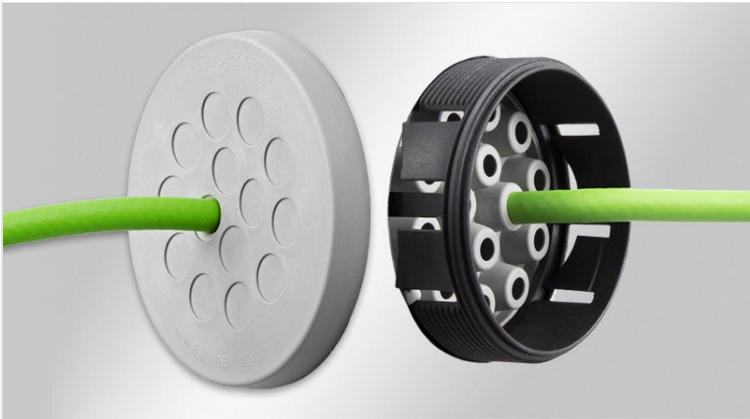

KEL-DPZ-CLICK cable entry plates are designed to route and seal cables without connectors or fibre optics (from 1.5 mm to 22 mm in diameter) in limited space.

The new variant of the proven cable entry plate KEL-DPZ is snapped into the cut-out directly from the front. This significantly reduces the assembly time. Alternatively, the new variant can be fastened with a locknut. The KEL-DPZ-CLICK series have a thread to fit in metric cut-outs from M25 to M63. Thus cut-outs for metric cable glands can be used.

**Snapped into the cut-out:**

For wall thickness 1 – 2.5 mm  
Protection IP65

**Fixed with a locknut:**

For max. wall thickness 11 mm  
Protection IP66 / IP68

IP54

IP68

IP55

IP64

IP65

IP66

Made in Germany

IP67

The assembly of the KEL-DPZ-CLICK with unterminated cables or pneumatic hoses can be done quick and easy. Simply make a small hole in the thin membrane, push the cables through. The KEL-DPZ-CLICK provides strain relief and protection IP65 / IP66 / IP68 (certified acc. to EN 60529).

ST-B Plugs can be used for sealing pierced membranes if cables have been removed.

**Locknuts are NOT included in the shipment.**

## Specifications


|                       |                                          |
|-----------------------|------------------------------------------|
| IP rating (EN 60529)  | IP54, IP55, IP64, IP65, IP66, IP67, IP68 |
| Material              | Elastomer<br>Base frame: Polyamide       |
| Flame class           | UL94-V0, self-extinguishing              |
| Operating temperature | -40 C° to 100 C°                         |
| Properties            | silicone free, halogen free              |
| Mounting options      | Fasten with locknut, Snap-in             |

## Advantages & benefits

- Fast mounting
- Offers two mounting types: Snap-in and locknut fixation
- High cable density
- Certified protection classes IP65/IP66/IP68 (acc. to EN 60529)
- Automatic sealing and strain relief for the cable
- Suitable for metric cut-outs
- Hygienic design - free of dirt-collecting recesses

## Product types & sizes


KEL-DPZ-CLICK 25|3  
gy



Part No. **44050**  
EAN **4251269323065**  
Package quantity **10**  
For max. no. of cables **3**  
Max. cable diameter **6,5 mm**  
Colour **grey (similar RAL 7035)**  
Height **28 mm**


Mounting height **8 mm**  
External diameter **39 mm**  
Cut-out size, round **25,3 mm**  
Cut-out size, metric **M25**  
Thread **M25 × 1,5**  
Thread length **20 mm**  
Suitable locknut **52284**  
Clamping range **2 x 3.2 - 5.2 mm**  
**1 x 3.2 - 6.5 mm**

KEL-DPZ-CLICK 25|4  
gy




|                        |                                |                      |                         |
|------------------------|--------------------------------|----------------------|-------------------------|
| Part No.               | <b>44051</b>                   | Mounting height      | <b>8 mm</b>             |
| EAN                    | <b>4251269323072</b>           | External diameter    | <b>39 mm</b>            |
| Package quantity       | <b>10</b>                      | Cut-out size, round  | <b>25,3 mm</b>          |
| For max. no. of cables | <b>4</b>                       | Cut-out size, metric | <b>M25</b>              |
| Max. cable diameter    | <b>5,2 mm</b>                  | Thread               | <b>M25 × 1,5</b>        |
| Colour                 | <b>grey (similar RAL 7035)</b> | Thread length        | <b>20 mm</b>            |
| Height                 | <b>28 mm</b>                   | Suitable locknut     | <b>52284</b>            |
|                        |                                | Clamping range       | <b>4 x 3.2 - 5.2 mm</b> |

KEL-DPZ-CLICK 32|4  
gy




|                        |                                |                      |                                                     |
|------------------------|--------------------------------|----------------------|-----------------------------------------------------|
| Part No.               | <b>44052</b>                   | Mounting height      | <b>8 mm</b>                                         |
| EAN                    | <b>4251269323089</b>           | External diameter    | <b>44 mm</b>                                        |
| Package quantity       | <b>10</b>                      | Cut-out size, round  | <b>32,3 mm</b>                                      |
| For max. no. of cables | <b>4</b>                       | Cut-out size, metric | <b>M32</b>                                          |
| Max. cable diameter    | <b>12,5 mm</b>                 | Thread               | <b>M32 × 1,5</b>                                    |
| Colour                 | <b>grey (similar RAL 7035)</b> | Thread length        | <b>20 mm</b>                                        |
| Height                 | <b>28 mm</b>                   | Suitable locknut     | <b>52285</b>                                        |
|                        |                                | Clamping range       | <b>3 x 3.2 - 6.5 mm</b><br><b>1 x 7.2 - 12.5 mm</b> |

KEL-DPZ-CLICK 32|4-2  
gy




|                        |                                |                      |                       |
|------------------------|--------------------------------|----------------------|-----------------------|
| Part No.               | <b>44053</b>                   | Mounting height      | <b>8 mm</b>           |
| EAN                    | <b>4251269323096</b>           | External diameter    | <b>44 mm</b>          |
| Package quantity       | <b>10</b>                      | Cut-out size, round  | <b>32,3 mm</b>        |
| For max. no. of cables | <b>4</b>                       | Cut-out size, metric | <b>M32</b>            |
| Max. cable diameter    | <b>9,5 mm</b>                  | Thread               | <b>M32 × 1,5</b>      |
| Colour                 | <b>grey (similar RAL 7035)</b> | Thread length        | <b>20 mm</b>          |
| Height                 | <b>28 mm</b>                   | Suitable locknut     | <b>52285</b>          |
|                        |                                | Clamping range       | <b>4 x 5 - 9.5 mm</b> |

KEL-DPZ-CLICK 32|7  
gy




|                        |                                |                      |                         |
|------------------------|--------------------------------|----------------------|-------------------------|
| Part No.               | <b>44054</b>                   | Mounting height      | <b>8 mm</b>             |
| EAN                    | <b>4251269323102</b>           | External diameter    | <b>44 mm</b>            |
| Package quantity       | <b>10</b>                      | Cut-out size, round  | <b>32,3 mm</b>          |
| For max. no. of cables | <b>7</b>                       | Cut-out size, metric | <b>M32</b>              |
| Max. cable diameter    | <b>6,5 mm</b>                  | Thread               | <b>M32 × 1,5</b>        |
| Colour                 | <b>grey (similar RAL 7035)</b> | Thread length        | <b>20 mm</b>            |
| Height                 | <b>28 mm</b>                   | Suitable locknut     | <b>52285</b>            |
|                        |                                | Clamping range       | <b>7 x 3.2 - 6.5 mm</b> |

KEL-DPZ-CLICK 40|8  
gy



|                        |                                |                      |                                                   |
|------------------------|--------------------------------|----------------------|---------------------------------------------------|
| Part No.               | <b>44055</b>                   | Mounting height      | <b>8 mm</b>                                       |
| EAN                    | <b>4251269323119</b>           | External diameter    | <b>52 mm</b>                                      |
| Package quantity       | <b>10</b>                      | Cut-out size, round  | <b>40,4 mm</b>                                    |
| For max. no. of cables | <b>8</b>                       | Cut-out size, metric | <b>M40</b>                                        |
| Max. cable diameter    | <b>10,2 mm</b>                 | Thread               | <b>M40 × 1,5</b>                                  |
| Colour                 | <b>grey (similar RAL 7035)</b> | Thread length        | <b>20 mm</b>                                      |
| Height                 | <b>28 mm</b>                   | Suitable locknut     | <b>52286</b>                                      |
|                        |                                | Clamping range       | <b>4 x 3.2 - 6.5 mm</b><br><b>4 x 5 - 10.2 mm</b> |


KEL-DPZ-CLICK 50|8  
gy



Part No. **44056**  
EAN **4251269323126**  
Package quantity **10**  
For max. no. of cables **8**  
Max. cable diameter **12,5 mm**  
Colour **grey (similar RAL 7035)**  
Height **28 mm**

Mounting height **8 mm**  
External diameter **62 mm**  
Cut-out size, round **50,4 mm**  
Cut-out size, metric **M50**  
Thread **M50 × 1,5**  
Thread length **20 mm**  
Suitable locknut **52287**  
Clamping range **5 x 5 - 10.2 mm**  
**3 x 7.2 - 12.5 mm**


KEL-DPZ-CLICK 50|10  
gy



Part No. **44057**  
EAN **4251269323133**  
Package quantity **10**  
For max. no. of cables **10**  
Max. cable diameter **22,2 mm**  
Colour **grey (similar RAL 7035)**  
Height **28 mm**

Mounting height **8 mm**  
External diameter **62 mm**  
Cut-out size, round **50,4 mm**  
Cut-out size, metric **M50**  
Thread **M50 × 1,5**  
Thread length **20 mm**  
Suitable locknut **52287**  
Clamping range **7 x 3.2 - 6.5 mm**  
**2 x 5 - 10.2 mm**  
**1 x 16 - 22.2 mm**


KEL-DPZ-CLICK 50|12  
gy



Part No. **44058**  
EAN **4251269323140**  
Package quantity **10**  
For max. no. of cables **12**  
Max. cable diameter **10,2 mm**  
Colour **grey (similar RAL 7035)**  
Height **28 mm**

Mounting height **8 mm**  
External diameter **62 mm**  
Cut-out size, round **50,4 mm**  
Cut-out size, metric **M50**  
Thread **M50 × 1,5**  
Thread length **20 mm**  
Suitable locknut **52287**  
Clamping range **4 x 3.2 - 6.5 mm**  
**8 x 5 - 10.2 mm**


KEL-DPZ-CLICK 50|19  
gy



Part No. **44059**  
EAN **4251269323157**  
Package quantity **10**  
For max. no. of cables **19**  
Max. cable diameter **6,5 mm**  
Colour **grey (similar RAL 7035)**  
Height **28 mm**

Mounting height **8 mm**  
External diameter **62 mm**  
Cut-out size, round **50,4 mm**  
Cut-out size, metric **M50**  
Thread **M50 × 1,5**  
Thread length **20 mm**  
Suitable locknut **52287**  
Clamping range **19 x 3.2 - 6.5 mm**


KEL-DPZ-CLICK 50|78  
gy



Part No. **44060**  
EAN **4251269323164**  
Package quantity **10**  
For max. no. of cables **78**  
Max. cable diameter **5 mm**  
Colour **grey (similar RAL 7035)**  
Height **28 mm**

Mounting height **8 mm**  
External diameter **62 mm**  
Cut-out size, round **50,4 mm**  
Cut-out size, metric **M50**  
Thread **M50 × 1,5**  
Thread length **20 mm**  
Suitable locknut **52287**  
Clamping range **76 x 1.5 - 2.6 mm**  
**2 x 2.5 - 5 mm**


**KEL-DPZ-CLICK 63|9  
gy**



Part No. **44061**  
EAN **4251269323171**  
Package quantity **10**  
For max. no. of cables **9**  
Max. cable diameter **22,2 mm**  
Colour **grey (similar RAL 7035)**  
Height **28 mm**

Mounting height **8 mm**  
External diameter **75 mm**  
Cut-out size, round **63,4 mm**  
Cut-out size, metric **M63**  
Thread **M63 × 1,5**  
Thread length **20 mm**  
Suitable locknut **52288**  
Clamping range **1 x 3.2 - 6.5 mm**  
**3 x 5 - 10.2 mm**  
**4 x 9 - 16.2 mm**  
**1 x 16 - 22.2 mm**


**KEL-DPZ-CLICK 63|13  
gy**



Part No. **44062**  
EAN **4251269323188**  
Package quantity **10**  
For max. no. of cables **13**  
Max. cable diameter **16,2 mm**  
Colour **grey (similar RAL 7035)**  
Height **28 mm**

Mounting height **8 mm**  
External diameter **75 mm**  
Cut-out size, round **63,4 mm**  
Cut-out size, metric **M63**  
Thread **M63 × 1,5**  
Thread length **20 mm**  
Suitable locknut **52288**  
Clamping range **4 x 3.2 - 6.5 mm**  
**4 x 5 - 10.2 mm**  
**5 x 9 - 16.2 mm**


**KEL-DPZ-CLICK 63|14  
gy**



Part No. **44063**  
EAN **4251269323195**  
Package quantity **10**  
For max. no. of cables **14**  
Max. cable diameter **10,2 mm**  
Colour **grey (similar RAL 7035)**  
Height **28 mm**

Mounting height **8 mm**  
External diameter **75 mm**  
Cut-out size, round **63,4 mm**  
Cut-out size, metric **M63**  
Thread **M63 × 1,5**  
Thread length **20 mm**  
Suitable locknut **52288**  
Clamping range **14 x 5 - 10.2 mm**

**KEL-DPZ-CLICK 63|35  
gy**



Part No. **44064**  
EAN **4251269323201**  
Package quantity **10**  
For max. no. of cables **35**  
Max. cable diameter **6,5 mm**  
Colour **grey (similar RAL 7035)**  
Height **28 mm**

Mounting height **8 mm**  
External diameter **75 mm**  
Cut-out size, round **63,4 mm**  
Cut-out size, metric **M63**  
Thread **M63 × 1,5**  
Thread length **20 mm**  
Suitable locknut **52288**  
Clamping range **35 x 3.2 - 6.5 mm**