

Rectangular & square punches

sized for heavy multi-pin industrial connectors and icotek cable entry systems



Rectangular and square punches and dies make it easy to punch holes into stainless steel (V2A versions), mild steel, aluminium or plastics with a max. sheet thickness of 2 mm. Available for cut-outs sizes of 10-, 16-, and 24- multi-pin heavy industrial connectors and also for numerous special cut-outs. Therefore, the punches are suitable for most icotek cable entry systems. Centre punches are integrated in the die for exact drilling of mounting holes.

The punches are for hydraulic operation only.

Scope of delivery:

- Punch, die and draw stud
- robust plastic storage case

Note: Punch 125 x 125 mm (order no. 80063) is only to be used with hydraulic foot pump (order no. 80002).

Specifications

Material	Steel, hardened and burnished
----------	-------------------------------

Advantages & Benefits

- Centre punches for exact drilling of mounting holes
- Robust plastic storage case
- Suitable for hand hydraulic punch driver by icotek and other manufacturers

Product Types & Sizes

Punch 24



Part No.	80053	Punching	Plastic, Mild
EAN	4251269316289	material	steel (St)
Package	1	Max. wall	2 mm
quantity	1	thickness	
Number of	4	Suitable draw	80209
center		stud	
punches		Suitable	80211
Cut-out size	112 x 36 mm	counter nut	
Suitable for	KEL-ER 24,	Suitable center	80065
cable entry	KEL 24, KEL-	punches	
systems:	U 24, KEL-FA		
	24, KEL-FG		
	A, KEL-FG-ER		
	A, KEL-		
	QUICK 24,		
	KEL-QTA 24,		
	KEL-BES 24,		
	KEL-BES-S		
	24, KEL-DPZ		
	24, KEL-DPU		
	24, KEL-DPU-		
	HD 24, KEL-		
	DP 24		
For cut-out of	24-pin		
connector			

Punch 24 V2A



Part No.	80153	Punching	Stainless
EAN	4251269316	material	steel (V2A)
	456	Max. wall	2 mm
Package	1	thickness	
quantity		Suitable draw	80209
Number of	4	stud	
center		Suitable	80211
punches		counter nut	
Cut-out size	112 × 36 mm	Suitable center	80065
Suitable for	KEL-ER 24,	punches	
cable entry	KEL 24, KEL-		
systems:	U 24, KEL-FA		
	24, KEL-FG		
	A, KEL-FG-ER		
	A, KEL-		
	QUICK 24,		
	KEL-QTA 24,		
	KEL-BES 24,		
	KEL-BES-S		
	24, KEL-DPZ		
	24, KEL-DPU		
	24, KEL-DPU-		
	HD 24, KEL-		
	DP 24		
For cut-out of	24-pin		
connector			

Punch 24-XL



Part No.	80054	Max. wall	2 mm
EAN	4251269316	thickness	
	296	Suitable draw	80209
Package	1	stud	
quantity		Suitable	80211
Number of	4	counter nut	
center		Suitable center	80065
punches		punches	
Cut-out size	112 × 46 mm		
Suitable for	KEL-ER 24,		
cable entry	KEL 24, KEL-		
systems:	U 24, KEL-FA		
	24, KEL-FG		
	A, KEL-FG-ER		
	A, KEL-		
	QUICK 24,		
	KEL-BES 24,		
	KEL-BES-S		
	24, KEL-DPZ		
	24, KEL-DPU		
	24, KEL-DPU-		
	HD 24		
Punching	Plastic, Mild		
material	steel (St)		

Punch 24-XL V2A



Part No.	80154	Max. wall	2 mm
EAN	4251269316463	thickness	
Package	1	Suitable draw	80209
quantity		stud	
Number of	4	Suitable	80211
center		counter nut	
punches		Suitable center	80065
Cut-out size	112 × 46 mm	punches	
Suitable for	KEL-ER 24,		
cable entry	KEL 24, KEL-		
systems:	U 24, KEL-FA		
	24, KEL-FG		
	A, KEL-FG-ER		
	A, KEL-		
	QUICK 24,		
	KEL-BES 24,		
	KEL-BES-S		
	24, KEL-DPZ		
	24, KEL-DPU		
	24, KEL-DPU-		
	HD 24		
Punching	Stainless		
material	steel (V2A)		

Punch KEA 24



Part No.	80101	Max. wall	2 mm
EAN		thickness	
Package	1	Suitable draw	80209
quantity		stud	
Number of	4	Suitable	80211
center		counter nut	
punches		Suitable center	80065
Cut-out size	112 × 56 mm	punches	
Suitable for	KEA 24 W90		
cable entry	S, KEA 24		
systems:	W90 R		
Punching	Plastic, Mild		
material	steel (St)		

Punch KEA 24 V2A



Part No.	80225	Max. wall thickness	2 mm
EAN		Suitable draw stud	80209
Package quantity	1	Suitable counter nut	80211
Number of center punches	4	Suitable center punches	80065
Cut-out size	112 × 56 mm		
Suitable for cable entry systems:	KEA 24 W90 S, KEA 24 W90 R		
Punching material	Stainless steel (V2A)		

Punch 24-E



Part No.	80061	Punching material	Plastic, Mild steel (St)
EAN	4251269318757	Max. wall thickness	2 mm
Package quantity	1	Suitable draw stud	80209
Number of center punches	-	Suitable counter nut	80211
Cut-out size	112 × 66 mm		
Suitable for cable entry systems:	KEL 24-E		
For cut-out of connector	32-pin		

Punch 16



Part No.	80052	Punching	Plastic, Mild
EAN	4251269316	material	steel (St)
	272	Max. wall	2 mm
Package	1	thickness	
quantity		Suitable draw	80209
Number of	4	stud	
center		Suitable	80211
punches		counter nut	
Cut-out size	86 × 36 mm	Suitable center	80065
Suitable for	KEL-ER 16,	punches	
cable entry	KEL 16, KEL-		
systems:	U 16, KEL-FA		
	16, KEL-		
	QUICK 16,		
	KEL-BES 16,		
	KEL-BES-S		
	16, KEL-DPZ		
	16, KEL-DP		
	16		
For cut-out of	16-pin		
connector			

Punch 16 V2A



Part No.	80152	Punching	Stainless
EAN	4251269316	material	steel (V2A)
	449	Max. wall	2 mm
Package	1	thickness	
quantity		Suitable draw	80209
Number of	4	stud	
center		Suitable	80211
punches		counter nut	
Cut-out size	86 × 36 mm	Suitable center	80065
Suitable for	KEL-ER 16,	punches	
cable entry	KEL 16, KEL-		
systems:	U 16, KEL-FA		
	16, KEL-		
	QUICK 16,		
	KEL-BES 16,		
	KEL-BES-S		
	16, KEL-DPZ		
	16, KEL-DP		
	16		
For cut-out of	16-pin		
connector			

Punch 10



Part No.	80051	Punching	Mild steel
EAN	4251269316	material	(St), Plastic
	265	Max. wall	2 mm
Package	1	thickness	
quantity		Suitable draw	80209
Number of	4	stud	
center		Suitable	80211
punches		counter nut	
Cut-out size	65 × 36 mm	Suitable center	80065
Suitable for	KEL-ER 10,	punches	
cable entry	KEL 10, KEL-		
systems:	U 10, KEL-FA		
	10, KEL-		
	QUICK 10,		
	KEL-QTA 10,		
	KEL-BES 10,		
	KEL-BES-S		
	10, KEL-DPZ		
	10, KEL-DP		
	10		
For cut-out of	10-pin		
connector			

Punch 10 V2A



Part No.	80151	Punching	Stainless
EAN	4251269316	material	steel (V2A)
	432	Max. wall	2 mm
Package	1	thickness	
quantity		Suitable draw	80209
Number of	4	stud	
center		Suitable	80211
punches		counter nut	
Cut-out size	65 × 36 mm	Suitable center	80065
Suitable for	KEL-ER 10,	punches	
cable entry	KEL 10, KEL-		
systems:	U 10, KEL-FA		
	10, KEL-		
	QUICK 10,		
	KEL-QTA 10,		
	KEL-BES 10,		
	KEL-BES-S		
	10, KEL-DPZ		
	10, KEL-DP		
	10		
For cut-out of	10-pin		
connector			

Punch 6



Part No.	80062	Punching	Plastic, Mild
EAN	4251269319013	material	steel (St)
		Max. wall	2 mm
Package	1	thickness	
quantity		Suitable draw	80209
Number of	4	stud	
center		Suitable	80211
punches		counter nut	
Cut-out size	52 x 36 mm	Suitable center	80065
Suitable for	KEL-DPZ 6,	punches	
cable entry	KEL-DP 6		
systems:			
For cut-out of	6-pin		
connector			

Punch 6 V2A



Part No.	80149	Punching	Stainless
EAN	4251269321542	material	steel (V2A)
		Max. wall	2 mm
Package	1	thickness	
quantity		Suitable draw	80209
Number of	-	stud	
center		Suitable	80211
punches		counter nut	
Cut-out size	52 x 36 mm	Suitable center	80065
Suitable for	KEL-DPZ 6,	punches	
cable entry	KEL-DP 6		
systems:			
For cut-out of	6-pin		
connector			

Punch B



Part No.	80049	Max. wall	2 mm
EAN	4251269331	thickness	
	831	Suitable draw	80209
Package	1	stud	
quantity		Suitable	80211
Number of	4	counter nut	
center		Suitable center	80065
punches		punches	
Cut-out size	46 x 46 mm		
Suitable for	KEL-ER-B,		
cable entry	KEL-B, KEL-		
systems:	U-B, KEL-FG-		
	B, KEL-FG-		
	ER-B, KEL-		
	QUICK-B,		
	KEL-QTA-B,		
	KEL-DPZ-B		
Punching	Plastic, Mild		
material	steel (St)		

Punch B



Part No.	80050	Max. wall	2 mm
EAN	4251269316	thickness	
	258	Suitable draw	80209
Package	1	stud	
quantity		Suitable	80211
Number of	-	counter nut	
center			
punches			
Cut-out size	46 x 46 mm		
Suitable for	KEL-ER-B,		
cable entry	KEL-B, KEL-		
systems:	U-B, KEL-FG-		
	B, KEL-FG-		
	ER-B, KEL-		
	QUICK-B,		
	KEL-QTA-B,		
	KEL-DPZ-B		
Punching	Plastic, Mild		
material	steel (St)		

Punch B V2A



Part No.	80150	Max. wall	2 mm
EAN	4251269316	thickness	
	425	Suitable draw	80209
Package	1	stud	
quantity		Suitable	80211
Number of	-	counter nut	
center			
punches			
Cut-out size	46 × 46 mm		
Suitable for	KEL-ER-B,		
cable entry	KEL-B, KEL-		
systems:	U-B, KEL-FG-		
	B, KEL-FG-		
	ER-B, KEL-		
	QUICK-B,		
	KEL-QTA-B,		
	KEL-DPZ-B		
Punching	Stainless		
material	steel (V2A)		

Punch E5



Part No.	80058	Max. wall	2 mm
EAN	4251269316	thickness	
	333	Suitable draw	80226
Package	1	stud	
quantity		Suitable	80211
Number of	2	counter nut	
center		Suitable center	80065
punches		punches	
Cut-out size	112 × 24 mm		
Suitable for	KEL-ER-E5,		
cable entry	KEL-E5, KEL-		
systems:	FG-E5, KEL-		
	FG-ER-E5,		
	KEL-QUICK-		
	E5, KEL-FL 4		
Punching	Plastic, Mild		
material	steel (St)		

Punch E4



Part No.	80057	Max. wall	2 mm
EAN	4251269316326	thickness	
Package	1	Suitable draw	80226
quantity		stud	
Number of	2	Suitable	80211
center		counter nut	
punches		Suitable center	80065
Cut-out size	86 × 24 mm	punches	
Suitable for	KEL-ER-E4,		
cable entry	KEL-E4, KEL-		
systems:	QUICK-E4,		
	KEL-FL 3		
Punching	Plastic, Mild		
material	steel (St)		

Punch E3



Part No.	80056	Max. wall	2 mm
EAN	4251269316319	thickness	
Package	1	Suitable draw	80226
quantity		stud	
Number of	2	Suitable	80211
center		counter nut	
punches		Suitable center	80065
Cut-out size	65 × 24 mm	punches	
Suitable for	KEL-ER-E3,		
cable entry	KEL-E3, KEL-		
systems:	FG-E3, KEL-		
	FG-ER-E3,		
	KEL-QUICK-		
	E3, KEL-FL 2		
Punching	Plastic, Mild		
material	steel (St)		

Punch E2



Part No.	80055	Max. wall	2 mm
EAN	4251269316302	thickness	
Package	1	Suitable draw	80226
quantity		stud	
Number of	2	Suitable	80211
center		counter nut	
punches		Suitable center	80065
Cut-out size	43 × 24 mm	punches	
Suitable for	KEL-ER-E2,		
cable entry	KEL-E2, KEL-		
systems:	FG-E2, KEL-		
	FG-ER-E2,		
	KEL-QUICK-		
	E2, KEL-FL 1		
Punching	Plastic, Mild		
material	steel (St)		

Punch E1



Part No.	80075	Max. wall	2 mm
EAN	4251269332517	thickness	
Package	1	Suitable draw	80205
quantity		stud	
Number of	2	Suitable	80227
center		counter nut	
punches			
Cut-out size	21 × 27 mm		
Suitable for	KEL-E1		
cable entry			
systems:			
Punching	Plastic, Mild		
material	steel (St)		

Punch 138×138



Part No.	80086	Suitable draw	80213
EAN	4251269336	stud	
	171	Suitable	80214
Package quantity	1	counter nut	
Number of center punches	-		
Cut-out size	138 × 138 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 138×68



Part No.	80094	Suitable draw	80213
EAN	4251269336	stud	
	256	Suitable	80214
Package quantity	1	counter nut	
Number of center punches	-		
Cut-out size	68 × 138 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 125×125



Part No.	80063	Suitable	80214
EAN	4251269322	counter nut	
Package quantity	1		
Number of center punches	-		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		
Suitable draw stud	80213		

Punch 92x92



Part No.	80060	Suitable draw	80209
EAN	4251269318	stud	
	252	Suitable	80211
Package quantity	1	counter nut	
Number of center punches	-		
Cut-out size	92 × 92 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 92×46



Part No.	80093	Suitable draw	80209
EAN	4251269336	stud	
	249	Suitable	80211
Package quantity	1	counter nut	
Number of center punches	-		
Cut-out size	46 × 92 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 92×45



Part No.	80092	Suitable draw	80209
EAN	4251269336	stud	
	232	Suitable	80211
Package quantity	1	counter nut	
Number of center punches	-		
Cut-out size	45 × 92 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 91×117



Part No.	80066	Suitable draw stud	80209
EAN		Suitable counter nut	80211
Package quantity	1		
Number of center punches	-		
Cut-out size	91 × 117 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 73×24



Part No.	80224	Suitable draw stud	80226
EAN		Suitable counter nut	80211
Package quantity	1	Suitable center punches	80065
Number of center punches	4		
Cut-out size	73 × 24 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 71×29



Part No.	80161	Suitable draw	80226
EAN		stud	
Package	1	Suitable	80211
quantity		counter nut	
Number of	-		
center			
punches			
Cut-out size	71 × 29 mm		
Punching	Plastic, Mild		
material	steel (St)		
Max. wall	2 mm		
thickness			

Punch 68×68



Part No.	80064	Suitable draw	80209
EAN		stud	
Package	1	Suitable	80211
quantity		counter nut	
Number of	-		
center			
punches			
Cut-out size	68 × 68 mm		
Punching	Plastic, Mild		
material	steel (St)		
Max. wall	2 mm		
thickness			

Punch 65×113



Part No.	80074	Suitable draw	80209
EAN		stud	
Package quantity	1	Suitable	80211
Number of center punches	-	counter nut	
Cut-out size	65 × 113 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 50.8×50.8



Part No.	80085	Suitable draw	80209
EAN	4251269336164	stud	
Package quantity	1	Suitable	80211
Number of center punches	-	counter nut	
Cut-out size	50.8 × 50.8 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 50×25



Part No.	80091	Suitable draw	80231
EAN	4251269336	stud	
Package quantity	225	Suitable counter nut	80227
Number of center punches	-		
Cut-out size	25 × 50 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 32×90



Part No.	80159	Suitable draw	80226
EAN		stud	
Package quantity	1	Suitable counter nut	80211
Number of center punches	-		
Cut-out size	32 × 90 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 25.4×25.4



Part No.	80084	Suitable draw	80205
EAN	4251269336	stud	
Package quantity	157	Suitable counter nut	80227
Number of center punches	-		
Cut-out size	25.4 × 25.4 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 24×57



Part No.	80223	Suitable draw	80226
EAN		stud	
Package quantity	1	Suitable counter nut	80211
Number of center punches	4	Suitable center punches	80065
Cut-out size	24 × 57 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 24×24



Part No.	80083	Suitable draw	80205
EAN	4251269336	stud	
Package quantity	140	Suitable	80227
Number of center punches	1	counter nut	
Cut-out size	24 × 24 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 22.2×22.2



Part No.	80067	Max. wall thickness	2 mm
EAN		Suitable draw	80205
Package quantity	1	stud	
Number of center punches	2	Suitable	80227
Cut-out size	22.2 × 22.2 mm	counter nut	
For cut-out of connector	HAN 3A	Suitable center punches	80232
Punching material	Plastic, Mild steel (St)		

Punch SUB-D9



Part No.	80073	Suitable draw	80228
EAN		stud	
Package	1	Suitable	80229
quantity		counter nut	
Number of	-		
center			
punches			
For cut-out of	SUB-D9		
connector			
Punching	Plastic, Mild		
material	steel (St)		
Max. wall	2 mm		
thickness			

Punch 22x45




Part No.	80059	Suitable draw	80205
EAN	4251269319	stud	
	174	Suitable	80227
Package	1	counter nut	
quantity			
Number of	-		
center			
punches			
Cut-out size	22 x 45 mm		
Punching	Plastic, Mild		
material	steel (St)		
Max. wall	2 mm		
thickness			

Punch 22x42



Part No.	80089	Suitable draw	80205
EAN	4251269336	stud	
	201	Suitable	80227
Package quantity	1	counter nut	
Number of center punches	-		
Cut-out size	22 × 42 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 22x30

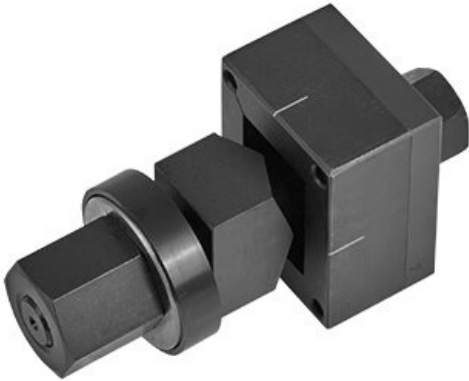

Part No.	80088	Suitable draw	80205
EAN	4251269336	stud	
	195	Suitable	80227
Package quantity	1	counter nut	
Number of center punches	-		
Cut-out size	22 × 30 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 21.3×21.3




Part No.	80082	Suitable draw	80205
EAN	4251269336	stud	
	133	Suitable	80227
Package quantity	1	counter nut	
Number of center punches	-		
Cut-out size	21.3 × 21.3 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 19.1×19.1



Part No.	80081	Suitable draw	80205
EAN	4251269336	stud	
	126	Suitable	80227
Package quantity	1	counter nut	
Number of center punches	-		
Cut-out size	19.1 × 19.1 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 19×17

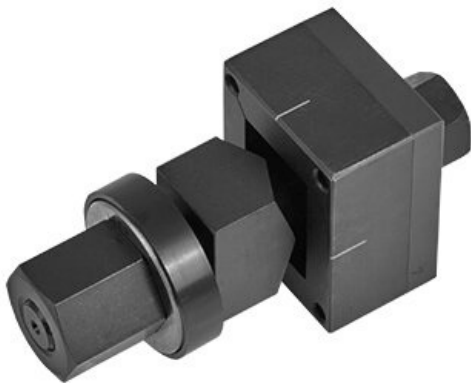

Part No.	80087	Suitable draw	80228
EAN	4251269336	stud	
Package quantity	188	Suitable counter nut	80229
Number of center punches	-		
Cut-out size	17 × 19 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 16.4×15.3



Part No.	80222	Suitable draw	80228
EAN		stud	
Package quantity	1	Suitable counter nut	80229
Number of center punches	-		
Cut-out size	16.4 × 15.3 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 15.8×15.8



Part No.	80080	Suitable draw	80228
EAN	4251269336	stud	
Package quantity	119	Suitable counter nut	80229
Number of center punches	-		
Cut-out size	15.8 × 15.8 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 15.4×14.5



Part No.	80220	Suitable draw	80228
EAN		stud	
Package quantity	1	Suitable counter nut	80229
Number of center punches	-		
Cut-out size	15.4 × 14.5 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Punch 12.7×12.7



Part No.	80079	Suitable draw	80228
EAN	4251269336	stud	
	102	Suitable	80229
Package quantity	1	counter nut	
Number of center punches	-		
Cut-out size	12.7 × 12.7 mm		
Punching material	Plastic, Mild steel (St)		
Max. wall thickness	2 mm		

Draw stud 80205



Part No.	80205
EAN	
Package quantity	1
Diameter D1	13 mm
Diameter D2	11 mm
Length	105 mm

Draw stud 80209



Part No.	80209
EAN	
Package quantity	1
Diameter D1	19 mm
Length	135 mm

Draw stud 80213



Part No.	80213
EAN	
Package quantity	1
Diameter D1	28,3 mm
Diameter D2	25 mm
Length	155 mm

Draw stud 80226



Part No.	80226
EAN	4251269336
Package quantity	263
Package quantity	1
Diameter D1	19 mm
Diameter D2	14 mm
Length	130 mm

Draw stud 80228



Part No.	80228
EAN	4251269336
	287
Package quantity	1
Diameter D1	9,5 mm
Diameter D2	8,25 mm
Length	105 mm

Draw stud 80231



Part No.	80231
EAN	4251269336
	317
Package quantity	1
Diameter D1	16 mm
Diameter D2	14,5 mm
Length	110 mm

Counter nut 80206



Part No.	80206
EAN	
Package quantity	1
Thread	1/2 UNF

Counter nut 80211

Part No. **80211**
EAN
Package quantity **1**
Thread **3/4 UNF**



Counter nut 80229

Part No. **80229**
EAN **4251269336294**
Package quantity **1**
Thread **3/8 UNF**



Counter nut 80214

Part No. **80214**
EAN
Package quantity **1**



