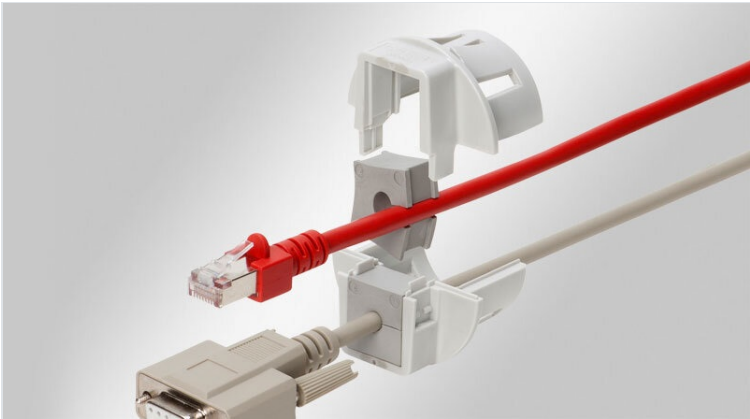


QVT-CLICK | Split cable gland for snap-in mounting

for cables with connectors, M16 - M50 / IP54



IP54

HL3
EN 45545-2

ECOLAB
certified

Made in
Germany

RoHS
compliant

REACH
COMPLIANCE

QVT-CLICK is a circular split frame for quick and easy installation of pre-terminated cables or complete cable harnesses. But also electric, pneumatic or hydraulic lines without terminals or connectors as well as corrugated conduits can be easily routed and sealed with IP54. Because of its extremely compact design, the QVT-CLICK range is especially suitable for small machines, devices and instruments.

The cable glands are easy to install. The prefabricated cable is placed into the slit grommet which is set into one of the gland halves. Depending on the size of the cable gland, one, two or four separate grommets can be installed. By using multi-hole grommets up to 16 lines can be routed with one cable gland.

The QVT-CLICK can be assembled without tools from the front side of the enclosure wall. Sizes QVT-CLICK 16, QVT-CLICK 20, QVT-CLICK 40|1 and QVT-CLICK 50 can be also screwed with a [locknut](#).

The QVT-CLICK Tool can be used for quick and easy mounting.

A sealing ring is included in the shipment.

Note:

Snap-in assembly QVT-CLICK 16 + 20 (wall thickness 1.5 - 2.5 mm)

Snap-in assembly QVT-CLICK 25 + 32 + 40 + 50 (wall thickness 1 - 2.5 mm)

Specifications


IP rating (EN 60529)	IP54
Material	Polycarbonate
Flame class	UL94-V0, self-extinguishing
Operating temperature	-30 C° to 100 C°
Mounting options	Snap-in

Advantages & benefits

- Fast and easy mounting from the front side
- Space-saving shape
- Routing of cables with and without connectors
- Warranty on pre-terminated cables remains
- Retrofits, repairs and maintenance can be done much more easily and quickly
- Fast mounting by snapping into the cut-out
- Greatly increased cable density when using double or quadruple grommets

Product types & sizes


QVT-CLICK 16 gy



Part No.	45726
EAN	4251269320552
Package quantity	10
For max. no. of cables	1
Max. cable diameter	10 mm
Colour	grey (similar RAL 7035)
External diameter	32 mm







Mounting height	13,5 mm
Cut-out size, metric	M16
Cut-out size, round	16,2 mm
Thread	M16 × 1,5
Thread length	13 mm
For min. wall thickness	1,5 mm
For max. wall thickness	2,5 mm
Suitable locknut	52272, 31105
Suitable for grommets	1 x QT small

QVT-CLICK 20 gy



Part No.	45728
EAN	4251269320569
Package quantity	10
For max. no. of cables	2
Max. cable diameter	11 mm
Height	27,8 mm
Mounting height	13,5 mm

Cut-out size, metric	M20
Cut-out size, round	20,4 mm
Thread	M20 × 1,5
Thread length	13 mm
For min. wall thickness	1,5 mm
For max. wall thickness	2,5 mm
Suitable locknut	52273, 31110
Suitable for grommets	1 x QT small

QVT-CLICK 25 gy 	Part No. EAN Package quantity For max. no. of cables Max. cable diameter Colour External diameter	45730 4251269311529 10 4 15 mm grey (similar RAL 7035) 39 mm	Mounting height Cut-out size, metric Cut-out size, round For min. wall thickness For max. wall thickness Suitable for grommets	13,5 mm M25 25,5 mm 1 mm 2,5 mm 1 x QT small
QVT-CLICK 32 gy 	Part No. EAN Package quantity For max. no. of cables Max. cable diameter Colour External diameter	45732 4251269311536 10 4 15 mm grey (similar RAL 7035) 39 mm	Mounting height Cut-out size, metric Cut-out size, round For min. wall thickness For max. wall thickness Suitable for grommets	13,5 mm M32 32,5 mm 1 mm 2,5 mm 1 x QT small
QVT-CLICK 40-1 gy 	Part No. EAN Package quantity For max. no. of cables Max. cable diameter Colour External diameter	45736 4251269323973 10 1 29 mm grey (similar RAL 7035) 50 mm	Mounting height Cut-out size, metric Cut-out size, round Thread Thread length For min. wall thickness For max. wall thickness Suitable locknut Suitable for grommets	13,5 mm M40 40,5 mm M40 × 1,5 20 mm 1 mm 2,5 mm 52276, 45107, 31130 1 x QT large
QVT-CLICK 40-2 gy 	Part No. EAN Package quantity For max. no. of cables Max. cable diameter Colour External diameter	45734 4251269311543 10 8 15 mm grey (similar RAL 7035) 50 mm	Mounting height Cut-out size, metric Cut-out size, round For min. wall thickness For max. wall thickness Suitable for grommets	13,5 mm M40 40,5 mm 1 mm 2,5 mm 2 x QT small
QVT-CLICK 50-1 gy 	Part No. EAN Package quantity For max. no. of cables Max. cable diameter Colour External diameter	45738 4251269323980 10 1 29 mm grey (similar RAL 7035) 62 mm	Mounting height Cut-out size, metric Cut-out size, round Thread Thread length For min. wall thickness For max. wall thickness Suitable locknut Suitable for grommets	22 mm M50 50,4 mm M50 × 1,5 20 mm 1 mm 2,5 mm 52277, 45108, 31140 1 x QT large
QVT-CLICK 50-4 gy 	Part No. EAN Package quantity For max. no. of cables Max. cable diameter Colour External diameter	45740 4251269323997 10 16 15 mm grey (similar RAL 7035) 62 mm	Mounting height Cut-out size, metric Cut-out size, round Thread Thread length For min. wall thickness For max. wall thickness Suitable locknut Suitable for grommets	22 mm M50 50,4 mm M50 × 1,5 20 mm 1 mm 2,5 mm 52277, 45108, 31140 4 x QT small

